
Plotting using Genominator and GenomeGraphs (Beta)

James Bullard

Kasper Daniel Hansen

Modified: April 18, 2010, Compiled: April 22, 2010

This vignette is preliminary, and should be viewed as subject to change. A number of the functions are not directly exported by the package – there is a reason for that.

In this vignette we demonstrate how to visualize data using the *GenomeGraphs* package. The main idea is that we want to build a plotting function which we can use to plot regions. The simplest case is the following:

First, we make a database:


```
> require(Genominator)
> options(verbose = FALSE)
> N <- 1e+05
> K <- 100
> df <- data.frame(chr = sample(1:16, size = N, replace = TRUE),
+   location = sample(1:1000, size = N, replace = TRUE), strand = sample(c(1L,
+   -1L), size = N, replace = TRUE))
> eData <- aggregateExpData(importToExpData(df, dbFilename = "pmy.db",
+   overwrite = TRUE, tablename = "ex_tbl"))
> annoData <- data.frame(chr = sample(1:16, size = K, replace = TRUE),
+   strand = sample(c(1, -1), size = K, replace = TRUE), start = (st <- sample(1:1000,
+   size = K, replace = TRUE)), end = st + rpois(K, 75),
+   feature = c("gene", "intergenic")[sample(1:2, size = K, replace = TRUE)])
> rownames(annoData) <- paste("elt", 1:K, sep = ".")

> rp <- Genominator:::makeRegionPlotter(list(track.1 = list(expData = eData,
+   what = "counts")))
> args(rp)

function (chr, start, end, overlays = NULL, title = NULL, ...)
NULL
```


This constructs a function which can be called to view particular pieces of data.

```
> rp(1, 10, 1000)
```

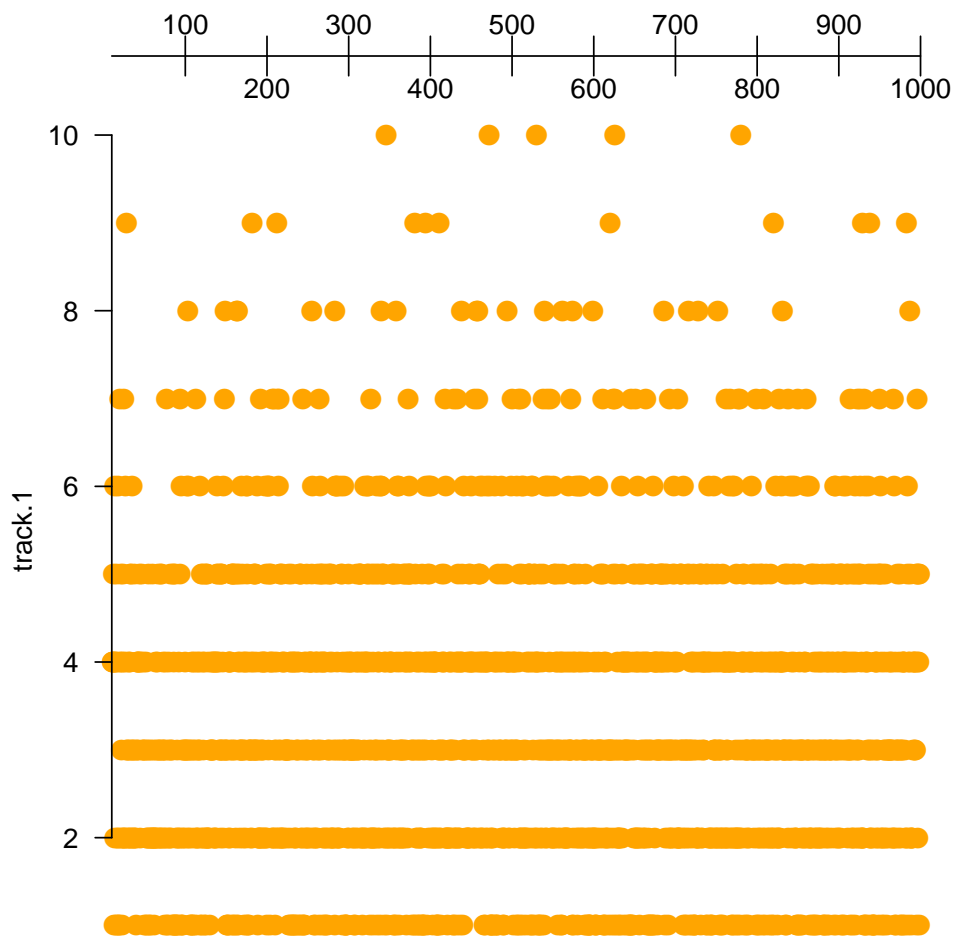


GenomeGraphs provides a wealth of customization options and means of plotting which for the most part are transferable using the list.

```
> rp <- Genominator:::makeRegionPlotter(list(track.1 = list(expData = eData,
+   what = "counts", dp = DisplayPars(lwd = 0.45, color = "grey"))))
> rp(1, 400, 500)
```

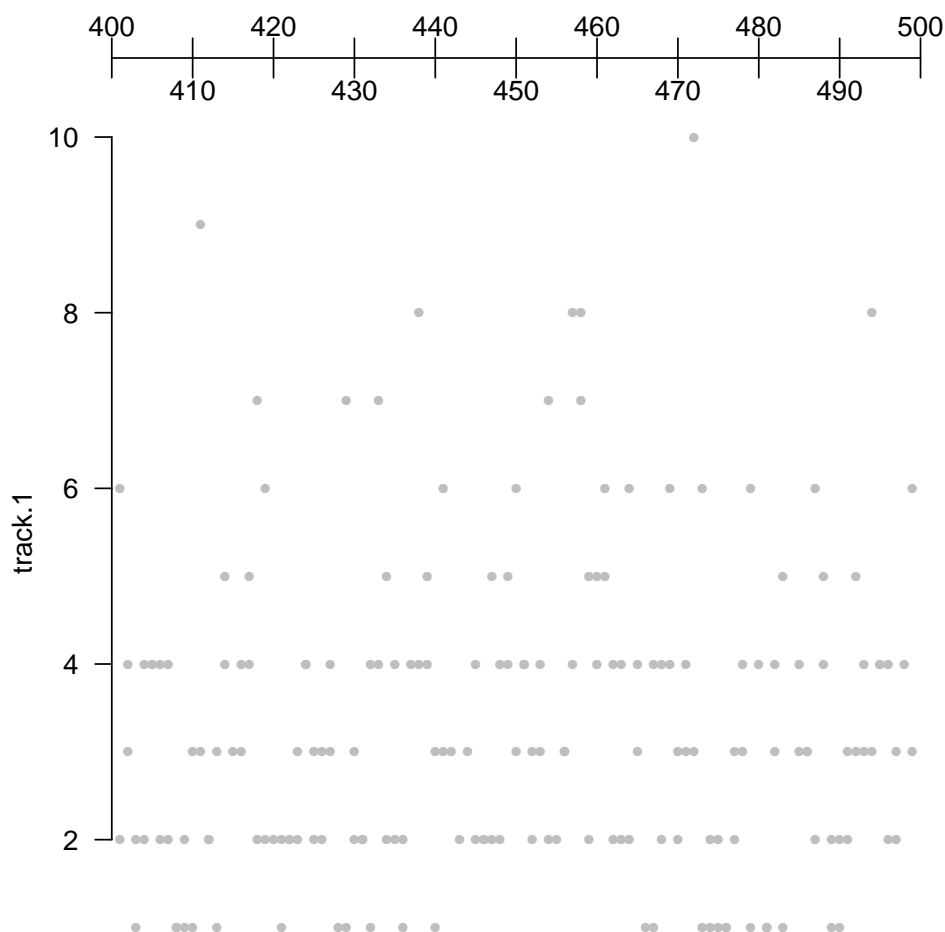

Here we can plot our annotation using the annotation factory construct. This is probably a little advanced. An easier thing is to use Ensembl to do the plotting of the annotation. Often, however, you will want to augment the annotation produced by Ensembl.

```
> annoFactory <- Genominator:::makeAnnoFactory(annoData, featureColumnName = "feature",
+   groupColumnName = NULL, idColumnName = NULL, dp = DisplayPars(gene = "blue",
+   intergenic = "green"))
> rp <- Genominator:::makeRegionPlotter(list(track.1 = list(expData = eData,
+   what = "counts", dp = DisplayPars(lwd = 0.2, color = "grey")),
+   track.2 = list(expData = eData, what = "counts", fx = log2,
+   DisplayPars(lwd = 0.3, color = "black"))), annoFactory = annoFactory)
> rp(annoData[1, "chr"], annoData[1, "start"] - 100, annoData[1,
+   "end"] + 100)
```

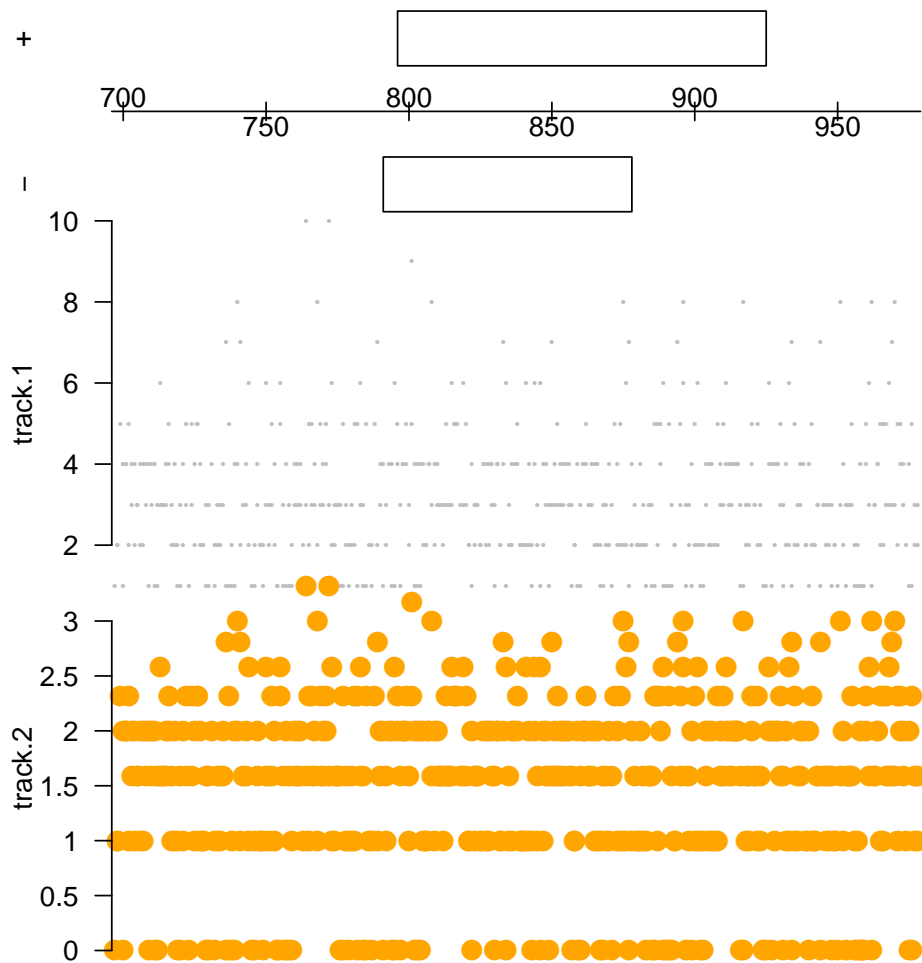


GenomeGraphs also offers a nice way to plot annotation for a given region using data from Ensembl or other sources of annotation - in some cases you have to do a little work because of the way that Biomart indexes the annotation and the way the *Genominator* package works (in this case yeast annotation is stored with Roman numerals denoting the chromosomes).

```
> require("biomaRt")
> mart <- useMart("ensembl", dataset = "scerevisiae_gene_ensembl")
> annoFactory <- Genominator::makeAnnoFactory(mart, chrFunction = function(chr) as.roman(chr))
> load(system.file("data", "chr1_yeast.rda", package = "Genominator"))
> head(chr1_yeast)
```

	chr	location	strand	mRNA_1	mRNA_2
1	1	1	-1	9.038919	8.614710
2	1	1	-1	9.172428	8.558421
3	1	2	-1	9.422065	9.131857
4	1	2	-1	8.679480	8.442943
5	1	2	-1	8.546894	8.794416
6	1	2	-1	8.784635	8.918863

```
> yData <- importToExpData(chr1_yeast, dbFilename = "my.db", tablename = "yeast",
+   overwrite = TRUE)
> rp <- Genominator::makeRegionPlotter(list(`track.-` = list(expData = yData,
+   what = c("mRNA_1", "mRNA_2"), fx = rowMeans, strand = -1,
```

```
+ dp = DisplayPars(lwd = 0.3, color = "grey"))), annoFactory = annoFactory)
> rp(1, 20000, 50000)
```

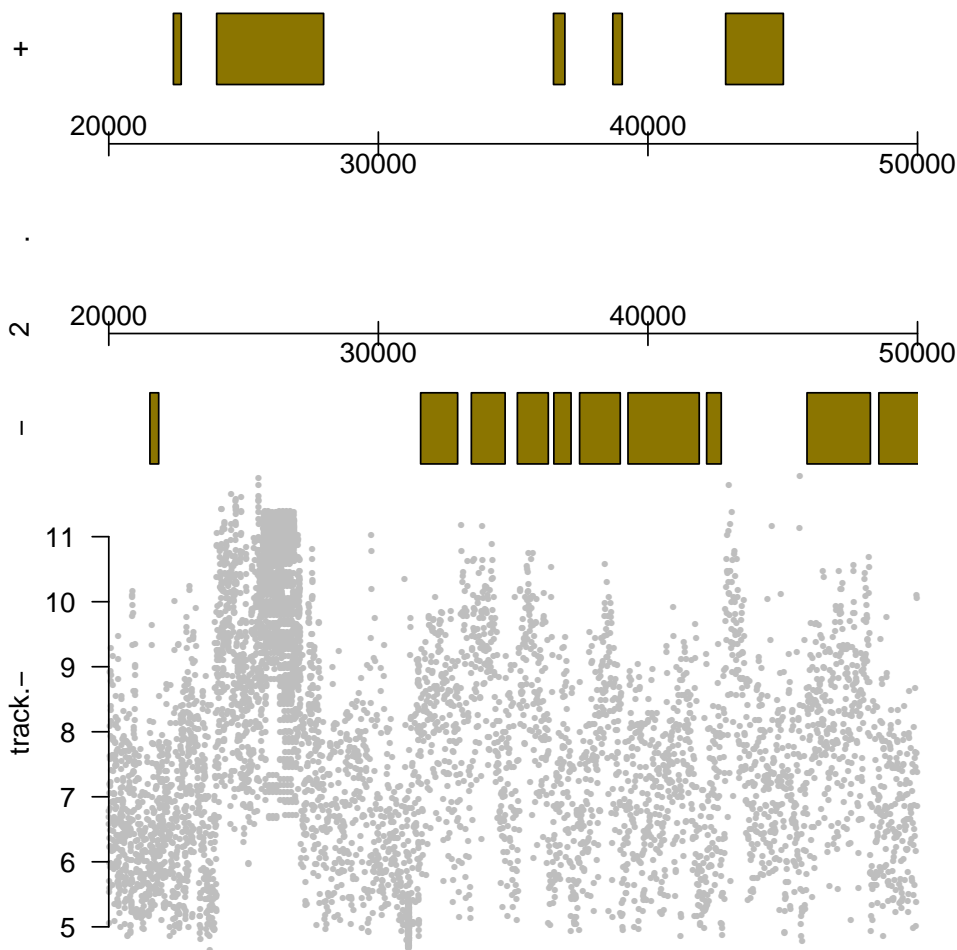

SessionInfo

- R version 2.11.0 (2010-04-22), i386-pc-mingw32
- Locale: LC_COLLATE=English_United States.1252, LC_CTYPE=English_United States.1252, LC_MONETARY=English_United States.1252, LC_NUMERIC=C, LC_TIME=English_United States.1252
- Base packages: base, datasets, graphics, grDevices, grid, methods, stats, tools, utils
- Other packages: biomaRt 2.4.0, DBI 0.2-5, GenomeGraphs 1.8.0, Genominator 1.2.0, IRanges 1.6.0, RSQLite 0.8-4
- Loaded via a namespace (and not attached): RCurl 1.3-1, XML 2.8-1